SUA740P

DesignerSeries™ Ultra Slim Articulating Wall Mount for 32" to 40" Ultra-Thin Displays\*

\* Designed for use with displays that are less than 3" (76mm) deep

# **Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SUA740P	16.38" x 16.14" x 1.74"-24.74" (416 x 410 x 44-628mm)	10.10lb (4.58kg)	60lb (27kg)	Scratch resistant fused epoxy	Gloss black

# **Package Specifications**

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SUA740P	21.25" x 3.25" x 19.50" (540 x 86 x 495mm)	13.25lb (6.01kg)	735029306375	Wall mount, wall and display installation hardware, installation instructions	1

### **Accessories**

ACC919: Security Fasteners

IBA2(AC)(-W), IBA3(AC)(-W): Recessed Cable Management and Power Storage Accessory Box

**IBA4-W:** Easy Mount Recessed Low Voltage Cable Plate


IBA5-W: Recessed Low Voltage Media Plate with Duplex Surge Suppressor


ESHV models: AV Wall Shelves
WSP756: Metal Stud Wall Plate

All dimensions = inch (mm)



**TOP VIEW** 

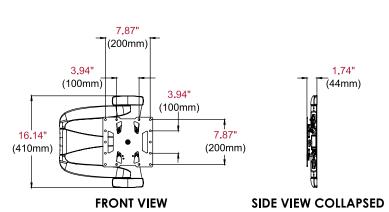



24.74" (628mm)

SIDE VIEW EXTENDED +15°/-5° TILT

### **Architect Specifications**

The DesignerSeries $^{TM}$  Ultra Slim Articulating Wall Mount shall be a Peerless-AV model SUA740P and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

### Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

### Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

### Peerless-AV de México

Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

